


Frictional Torque Sensor System

FGDH-4A

Easy torque measurement
by simply fitting!

No need to install strain gauges on the drive shaft, one-touch measurement is possible and significantly reduces preparation time.

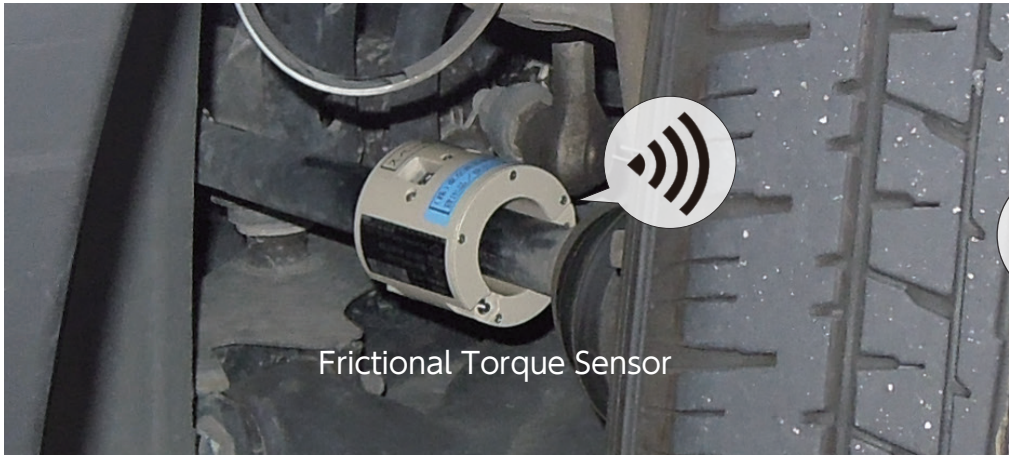

Frictional Torque Sensor



Dedicated digital telemetry receiver

The FGDH-4A friction-type torque sensor system measures the torque generated on a rotating shaft and transmits the digital data wirelessly.

The radio bandwidth of 2.4 GHz allows for long transmission distances and easy installation of a receiving antenna.

The sensor is simply mounted by clamping the shaft and fastening with screws.

The applicable shaft diameter is $\phi 20$ -30mm, $\phi 30$ -40mm and $\phi 40$ -50mm.

Feature

- 1 Longer measurement time!
Lasts approx. 1.7 times longer!

Conventional FGDH-3A: 6 hours
New product FGDH-4A: 10 hours

- 2 Switchable between three ranges of ± 3200 , ± 6400 , $\pm 16000 \times 10^{-6}$

- 3 Available as a transmitting unit for affixed strain gauges!

- 4 High-speed processing means that the delay time for digital telemetry is less than 1/10th of that of conventional systems!



NEW


Frictional Torque Sensor

FGDH-4A

Frictional Torque Sensor System

Frictional Torque Sensor : FGDH-4A

Receiver : DT-282R

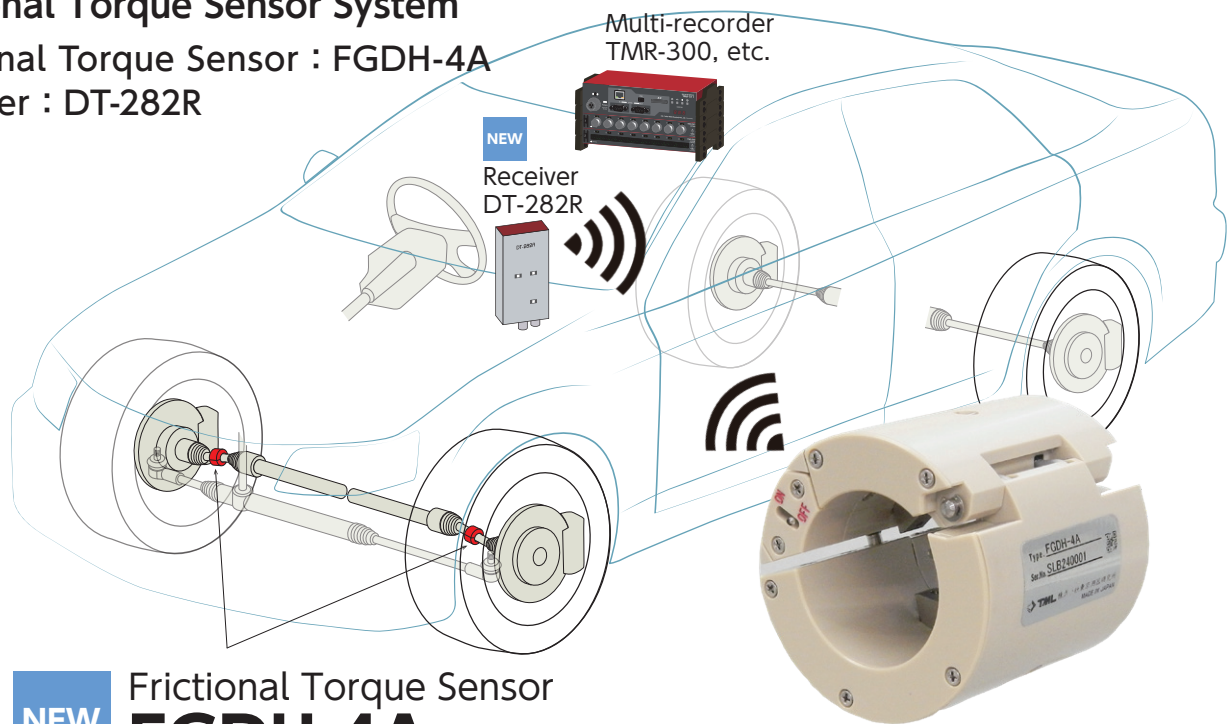

NEW


Frictional Torque Sensor FGDH-4A

● CE marking compliant

For non-EU countries, CE Mark-compliant products are shipped on request.

● Use of friction-type gauges

Ordinary strain gauges require preparation for bonding and wiring of leads. Friction-type gauges do not require any gluing work, so sensors with these gauges integrated can be mounted on the shaft with great simplicity.



● Built-in sleep function

Power-saving design automatically puts the receiver in sleep mode when switched off. This reduces battery drain and provides a longer operating time.

● Uses 2.4 GHz radio bandwidth

This product complies with the standards of Japan, EU member states, the United States, Canada, China, and India.

● Easy-to-use rechargeable

The power supply uses a rechargeable USB power cable, so the sensor can be recharged without having to be removed.

● Applicable diameters $\varnothing 20-30$, $\varnothing 30-40$ and $\varnothing 40-50$ mm

● Wide measuring range of ± 3200 , ± 6400 , $\pm 16000 \times 10^{-6}$ strain

The wide measuring range enables measurement of even large amplitude torques.

*For details, see specifications (sensors).


● Digital transmitter/receiver system makes it noise-resistant and integrated, eliminating the need for wiring work.

● Response frequency 1 kHz

● No calibration required

Part Names

Applicable to different shaft diameters $\varnothing 20-30$ mm, $\varnothing 30-40$ mm and $\varnothing 40-50$ mm by simply replacing the spacer by removing the screw.

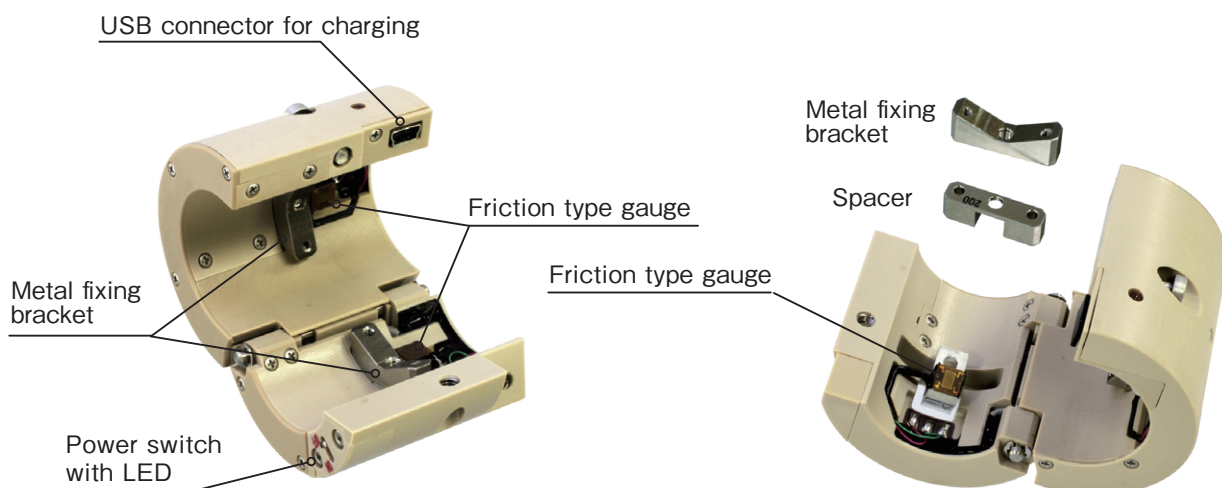

Friction type torque sensor system FGDH-4A series

Specification (sensor)

Type	FGDH-4A	FGDH-4A-30/40	FGDH-4A-40/50
Applicable shaft diameter	φ 20.0 ~ 30.0mm	φ 30.0 ~ 40.0mm	φ 40.0 ~ 50.0mm
Capacity	Depends on the diameter (outer and inner), material, surface roughness and surface treatment of the shaft *		
Output	Depends on the diameter (outer and inner), material, surface roughness and surface treatment of the shaft *		
Allowable temperature	-20 to +60 °C (No dew condensation)		
Sampling frequency	5kHz		
Frequency response	1kHz		
Wireless specifications	Conforms to 2.4 GHz band advanced low power data communication system		
Number of radio channels	16 channels (paired with receiver radio channels)		
External Dimensions	φ 52×50mm	φ 64×50mm	φ 75×50mm
Weight(spacer excluded)	Approx. 85 g (Excluding spacers)	Approx. 130 g (Excluding spacers)	Approx. 160 g (Excluding spacers)
Protection rating	Equivalent to IP51		
Continuous operating time	Approx. 10 hours (23 °C ±5 °C)		
Power supply	lithium-ion rechargeable battery		
Accessory	USB charger (FGDHF-51) / USB cable (mini-B-A) CR-6187		

* Some shafts may not be applicable depending on the shaft material, surface roughness and surface treatment. Please contact the sales person in charge in advance.

Test conditions

- Torque 500N·m
- Output 2500mV (equivalent to 8000×10^{-6} strain)
- Non-linearity 1%RO (when output is 8000×10^{-6} strain)
- Conditions of test piece
 1. Diameter 20mm
 2. Material SNCM439
 3. Elastic Modulus 210000 N/mm² (test result by TML)
 4. Poisson's Ratio 0.29 (test result by TML)
 5. Surface roughness Ra3.2
 6. Hardness HRC38

Friction type torque sensor FGDH-4A



Dedicated digital telemetry receivers



Dedicated digital telemeter receiver DT-282R


Specification (receiver)

Type	DT-282R
Radio part	
Received point	1
Wireless specification	2.4 GHz band advanced low-power data communication compliant
Number of radio channels	16 channels (Switching by radio channel switching SW)
Wireless antenna connection terminal	SMA connector
Power output section	
Voltage output connector	BNC connector
Voltage output	±5V Selected by strain output range selector switch ±16000×10 ⁻⁶ strain ±6400×10 ⁻⁶ strain ±3200×10 ⁻⁶ strain
Voltage output accuracy	±0.5% FS (whole system)
Stability Zero point	±0.55mV/°C (whole system)
Stability Sensitivity	±0.05% FS/°C (whole system)
S/N ratio	47dB (whole system)
Calibration output level	±5V
Low-pass filter	100Hz, 500Hz, PASS (1kHz)(-3dB±1dB)
Equilibrium adjustment range	±6000×10 ⁻⁶ strain
Equalization accuracy	±5mV
Display and operation	Strain output range selector switch, LPF selector switch, calibration output selector switch, balance adjustment switch, output level LED

General	
Rated voltage	DC9 ~ 16V
Current consumption	80mA MAX (DC12V supply +23°C±5°C)
Connector	Hosiden HEC3800 (compatible plug φ5.5 x 3.3PIN φ1)
Operating temperature/humidity range	0 to +50° C 85%RH or less (excluding condensation)
External dimension	48(W)×23.5(H)×100(D)mm (Excluding projections)
Weight	Approx. 140 g
Accessory	BNC coaxial cable (CR-31) DC power cable (CR-062) Receiver antenna

*DT-282R is not compatible with DT-182R

Dedicated digital telemeter receiver DT-282R

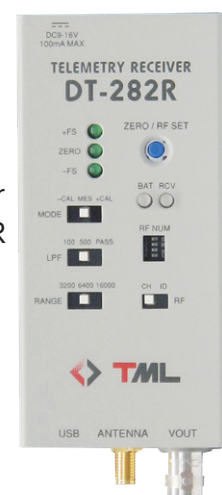


Exterior Dimension

FGDH-4A

FGDH-4A-30/40

FGDH-4A-40/50

DT-282R

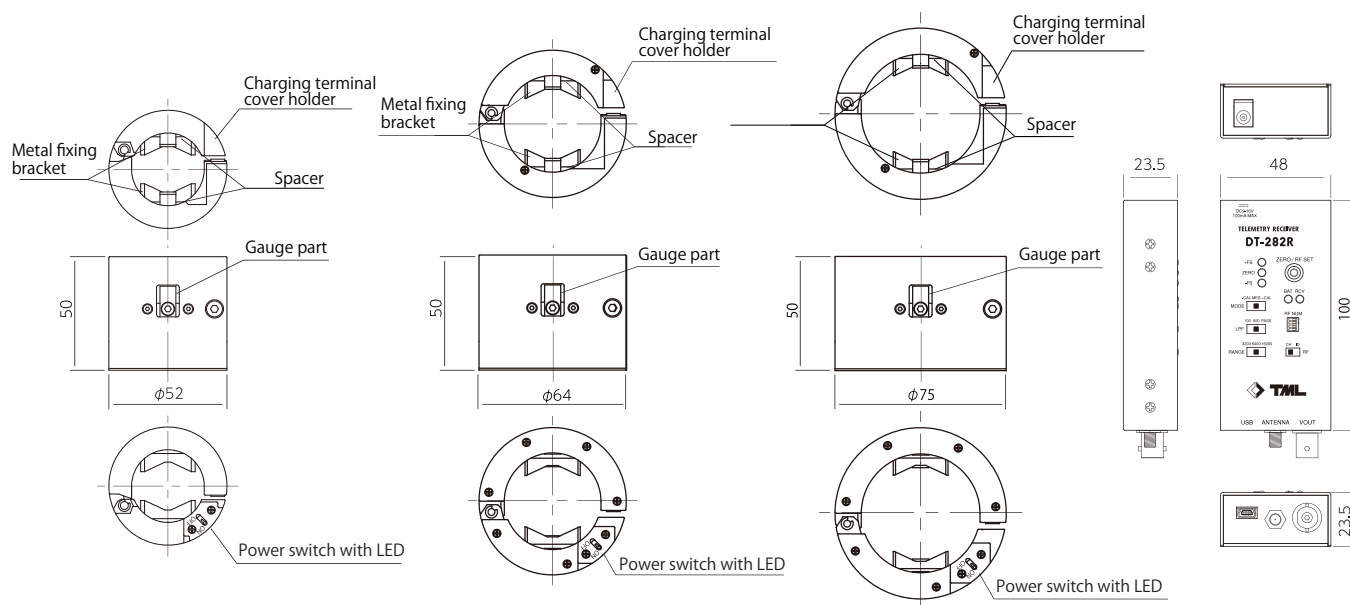

Related products

Torque screwdriver handle FGDHF-11B

Replacement shafts for torque screwdrivers

FGDHF-12B(M3: For holder fixing/gauge mounting)

FGDHF-13B(M4)

FGDHF-14B(M2.5:USB)

FGDHF-15B(M2: Spacer replacement)

Storage Trunk FGDHF-21 (FGDH-4A)

FGDHF-22 (FGDH-4A-30/40)

FGDHF-23 (FGDH-4A-40/50)

Friction type torque sensor FGDHF-61(FGDH-4A)

protective cover FGDHF-62(FGDH-4A-30/40)

FGDHF-63(FGDH-4A-40/50)



FGDHF-61

Adaptor for adjustment
2 each of 5 sizes included

FGDHF-61 Combined weight		FGDHF-62 Combined weight *planned		FGDHF-63 Combined weight *planned	
Adapter size	Weight	Adapter size	Weight	Adapter size	Weight
φ 21	Approx.34g	φ 31	Approx.47g	φ 41	Approx.59g
φ 23	Approx.31g	φ 33	Approx.43g	φ 43	Approx.53g
φ 25	Approx.27g	φ 35	Approx.38g	φ 45	Approx.47g
φ 27	Approx.24g	φ 37	Approx.33g	φ 47	Approx.40g
φ 29	Approx.20g	φ 39	Approx.28g	φ 49	Approx.34g

- Notes.**
- Please contact us if you wish to carry out high-precision measurements
 - The surface must be stripped of paint and degreased as far as possible
 - Sudden torque fluctuations may not be followed
 - Accurate measurement may be impaired by shaft surface conditions



The contents of this catalog are subject to change without prior notice.
The contents of this catalog are as of April 2025. TML Pam E6012E.



8-2, Minami-ohi 6-chome, Shinagawa-ku, Tokyo 140-8560, JAPAN
TEL: +81-3-3763-5614 FAX: +81-3-3763-6128

